

SARACEN 6000 3 Hook 2 Roller

multi-point door lock


The lock has 3 hooks and 2 roller cams for enhanced performance and weather sealing.

The rollers ensure precise compression of the weather seal and door alignment in the frame, while the hooks offer extra security.

The bi-directional hooks ensure maximum resistance to anti-lift and separation providing a secure barrier against forced entry.

The central gearbox, available in two backsets, has a robust central hook with a snib facility on the reversible sash (latch) bolt. A split spindle option allows for back or front door operation on the same lock.

Complementary door furniture, cylinders, letterplates and hinges available.

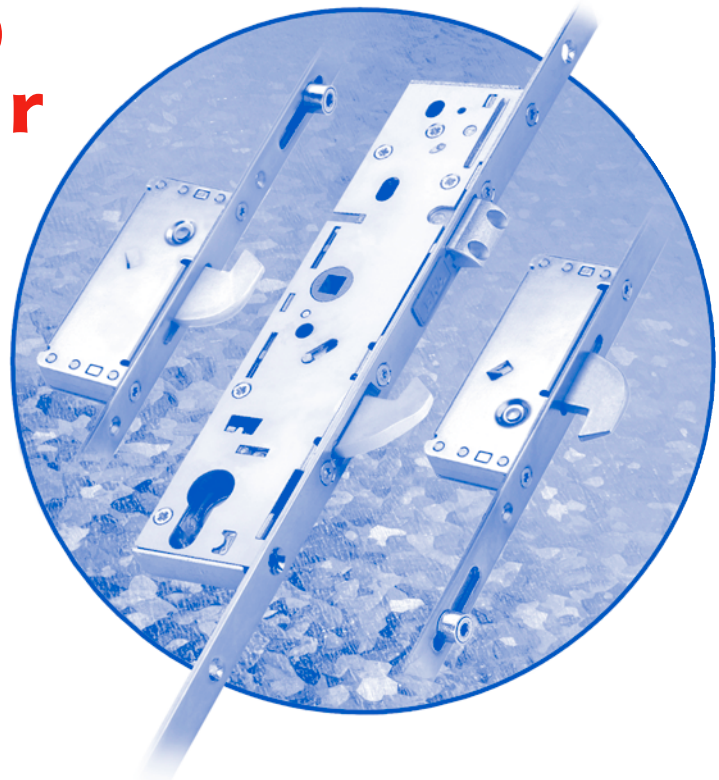

Technical information

Corrosion resistance: Meets the Requirements of BS EN 1670:2007 Grade 4 (minimum)

Operation: Function test 100,000 cycles

Material specification

Lock Case: Steel BZP CR3 passivate and seal

Face Bar: Steel BZP CR3 passivate and seal

Dead/sash bolt: Forged brass. Satin chrome plate

Hooks: Forged brass. Satin chrome plate

Rollers: Steel BZP CR3 passivate and seal

Keeps:* Steel BZP CR3 passivate and seal

Keep packers: Black Nylon

Product options

Saracen 3 Hook 2 Roller. Backsets 35mm, 45mm.


16mm Face Bar.

Multi profile designed keeps and packers (6000 Series).

Shootbolt extensions. Slave lock.

*Single keep and Multi keep available.

See opposite for complete list of product codes.

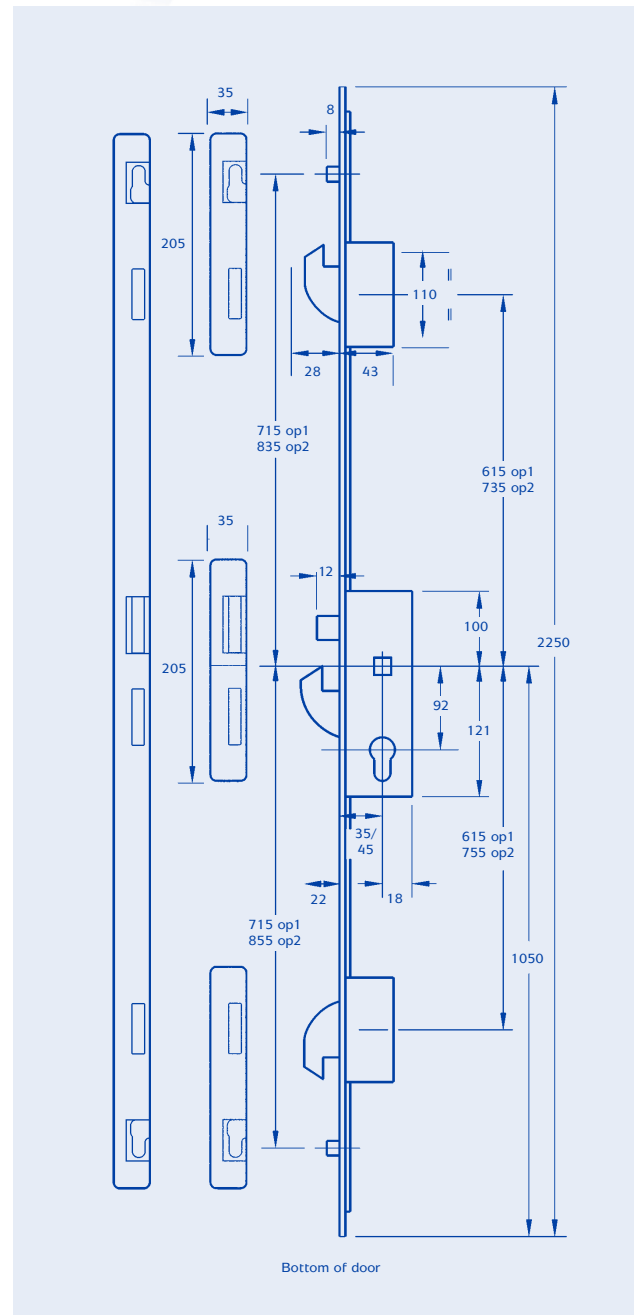

SARACEN 6000 3 Hook 2 Roller

Part numbers

	Option 1	Option 2
35mm	DLSX353H2R01	DLSX353H2R02
45mm	DLSX453H2R01	DLSX453H2R02

Packing information

5 Locks per box